


BARREL RAIN SANDER

Manufactured by Pacific Kiln & Insulations Co., Inc.

Designed and built to withstand the rigors of foundry use, the Pacific Kiln barrel rain sander provides accurate application of material to the mold without danger of damaging the pattern. Check the many features:

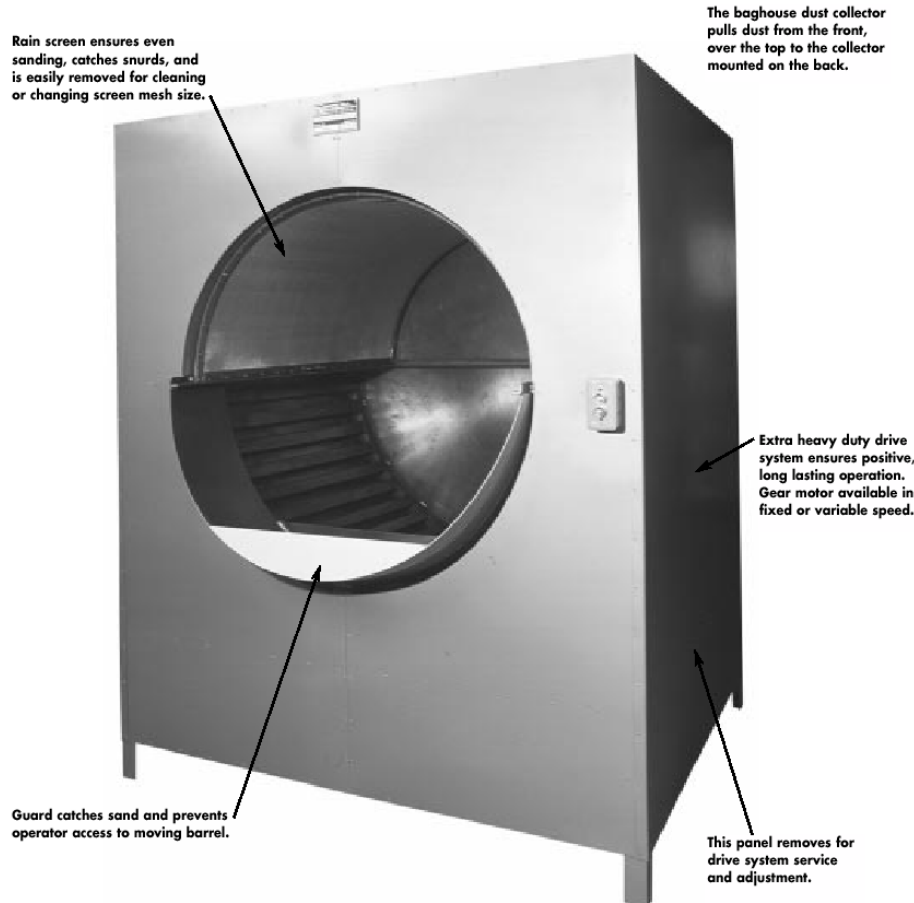

BARREL RAIN SANDER SPECIFICATIONS

MODEL	OPENING SIZE	OUTSIDE DIMENSIONS	BARREL RPM	HP	ELECTRICAL	SHIPPING WEIGHT
BRS-18	18"	42"W x 30"D x 68"H	4	1/3	115/230v, 60 HZ	735 lbs.
BRS-24	24"	48"W x 36"D x 72"H	4	1/3	115/230v, 60 HZ	800 lbs.
BRS-30	30"	54"W x 42"D x 76"H	4	1/3	115/230v, 60 HZ	874 lbs.
BRS-36	36"	60"W x 48"D x 80"H	4	1/2	115/230v, 60 HZ	965 lbs.
BRS-42	42"	66"W x 54"D x 84"H	4	1/2	115/230v, 60 HZ	1450 lbs.
BRS-48	48"	72"W x 60"D x 88"H	4	1	230/460v, 60 HZ 3s	1800 lbs.
BRS-60	60"	84"W x 72"D x 96"H	4	1	230/460v, 60 HZ 3s	2200 lbs.

Specifications subject to change without notice. Check with manufacturer for critical specification requirements.



R&R
DENSPLY

EUROPEANAGENT:

HTM Tradeco Ltd.
Phone: 208/4434323 (UK)
Fax: 208/8040127 (UK)
htmtradecoltd@aol.com

Ransom & Randolph

3535 Briarfield Blvd.
Maumee, OH 43537 USA
USA Phone: (800)800-7496
Phone: (419)865-9497
FAX: (419)865-9997
www.ransom-randolph.com

Available Options

Baghouse Dust Collection System

Mounted on the back of the Rain Sander, the vacuum duct goes over the top of the unit, drops down and around the top half of the sander opening. Dust is pulled upward into the duct by high velocity suction.

NOTE: Rain Sanders not fitted with dust collection will most certainly produce dust and shop dust collection is rarely adequate to prevent operator exposure.

Dust Collection Hood

Foot Switch for On/Off Control

Variable Speed Operation



R&R
DENSPLY

EUROPEANAGENT:

HTM Tradeco Ltd.
Phone: 208/4434323 (UK)
Fax: 208/8040127 (UK)
htmtradecoltd@aol.com

Ransom & Randolph

3535 Briarfield Blvd.
Maumee, OH 43537 USA
USA Phone: (800)800-7496
Phone: (419)865-9497
FAX: (419)865-9997
www.ransom-randolph.com